



DESCRIPTION

Digital multifunction solenoid driven dosing pump.
Constant or proportional dosing mode.

- Reinforced PP housing, suitable for aggressive working environment;
- Inputs: level probe, inhibitor, proximity sensor;
- Standard power supply 240Vac - 50 / 60Hz
- Selectable language and units of measurement;
- 132x56 pixel graphic display;
- Simplified menu access via knob / encoder;
- IP65 protection degree;
- Wall mounting bracket supplied with installation kit.

WORKING MODE

- Mode proportional to a 4-20mA signal;
- Mode proportional to a pulse-emitting water meter: 1xN; 1xN (M); 1: N; PPM;
- Programming delay intervention of the level probe;
- Daily weekly timer for programmed dosages;
- 3 different selectable performance setup.



TECHNICAL FEATURES


	Standard version
Pump head	PVDF
Pump housing	PP
Diaphragm	PTFE
Balls	Ceramica
Body valve	1/2" - PVDF
O-rings	FPM Viton®
Injection ball valve (Spring)	Hastelloy-Pyrex
Injection fitting / Attack	PVDF - 4x6
Foot valve	PVDF
Power supply	240 Vac 50/60Hz

EPDM gasket, upon request

Automatic bleeding version on request



DIMENSIONS

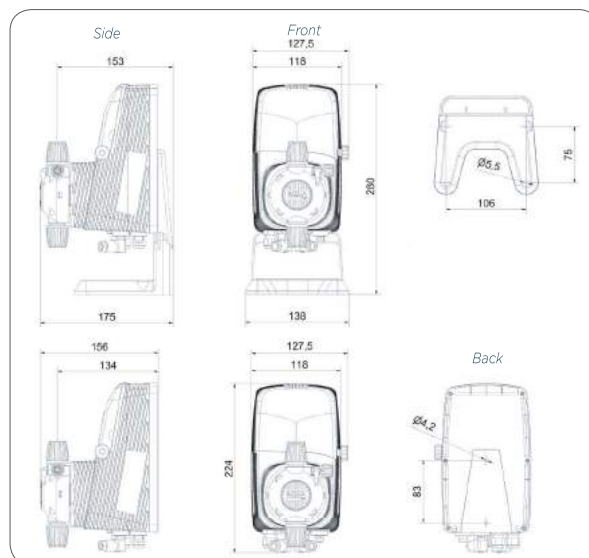


STANDARDS

- n°. 2004/108/CE EMC directive
- n°. 2006/95/CE "DBT Low Voltage Directive"
- n°. 2011/65/UE, 2012/19/UE "RoHs and WEEE directives"



PACK



Single pack
axbxc: 192x160x250 mm
Kg: 2,86
Multipack
6pz/pcs - axbxc: 405x270x515mm
Kg: 18,16






INSTALLATION KIT

Code	Description	
KITPDE506	HC151+ PVDF installation kit	

PERFORMANCE

Code	Solenoid	Type	Flow rate	Pressure	Strokes	Stroke volume	Consumption
			(l/h)	BAR	n° / min	ml/stroke	Watt
ADA12013A2000	M60	A	1	7	100	0,17	14
			5	1		0,83	
		B	3	7	150	0,33	
			9	1		1	
		C	5,5	6	180	0,51	
			10	1		0,93	
ADA12023A2000	M70	A	1,8	20	75	0,4	16
			4	1		0,89	
		B	4	12	120	0,56	
			7	1		0,97	
		C	5,8	9	180	0,54	
			14	1		1,3	
ADA12033A2000	M80	A	4	20	150	0,44	22
			10	1		1,11	
		B	6,5	12	200	0,54	
			13	1		1,08	
		C	13,5	5	300	0,75	
			20	1		1,11	

PERFORMANCES GRAPH

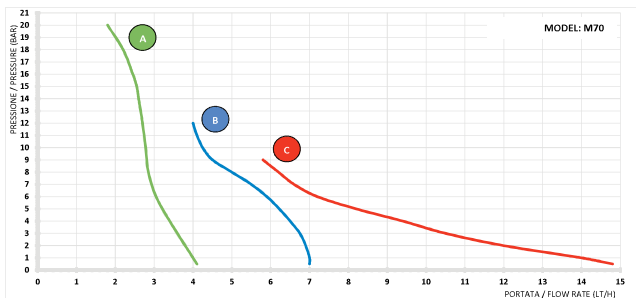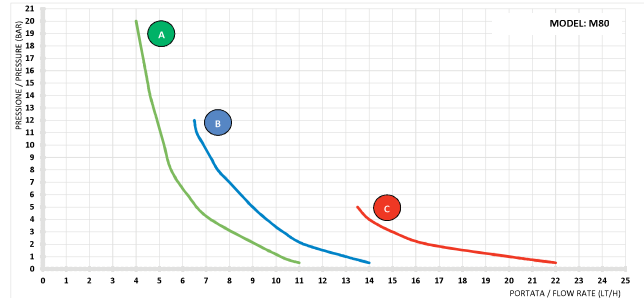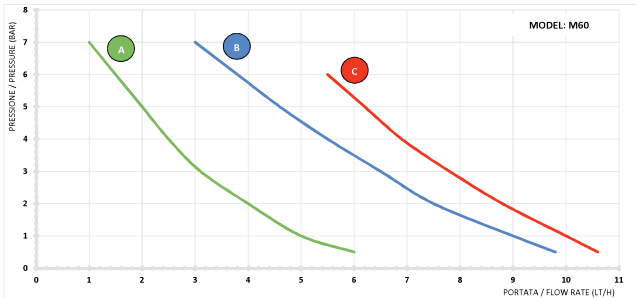

CONNECTIONS



The above datas are referring to tests made with water at room temperature. Values may vary by 10%.