

## AQUA F03 High pressure filter housings



The AQUA High pressure F03 line filter housings are of 3 piece design and are available in 5, 7 & 9 ¾" sizes. The heads are made with female inlet/outlet threads, in brass and brass blow off valve or ¼" connection points for pressure gauge fitting.

The F03 line is suitable for products used in the semi-professional and professional sector, where excellent performance is required due to the presence of chemicals and high working pressures and temperatures

All containers are designed to hold standard filter cartridges measuring 5, 7 & 9 ¾, depending on port size, and are wall mountable.

All housings come without cartridges; bracket & spanner, a full range of options are available upon request.






## Technical Characteristics

Head	Brass
Sump	Transparent (Trogamid)
O-Ring	Viton
Working pressure	12 bar max
Burst pressure	50 bar max
Working temperature	0-80°C
Capacity Lt/Min(empty) at 2 bar	¾"-105/ 1"-106/ 1 ¼"-219/ 1 ½"-219/ 2" -194
Life test	200,000 cycles from 0-10 bar

## Housing Options

Length	Port size	Thread type	Model	Head Colour	Bowl
5	¾"	Brass = BT	FP3 = 3P	Brass	Clear
7	1"				
9 ¾"	1 ½"				
	2"				
Code : 9 ¾"	1"	BT	3P	Brass	

## Dimensions

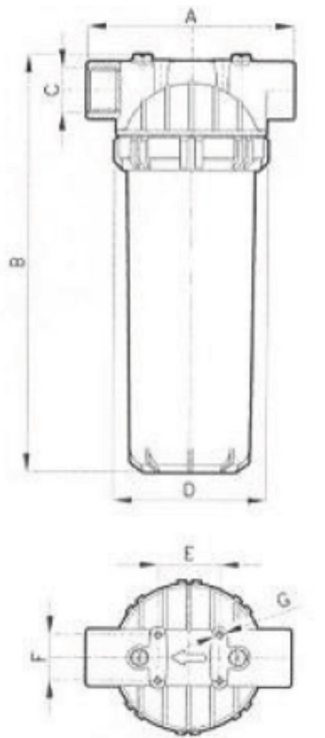

- A: 150mm
- B: 5" 193/ 7" 244/ 9 ¾" 310 (1 ½" & 2" 340) mm
- C: ¾"/ 1"/ 1 ½" / 2"
- D: 112mm
- E: 45mm
- F: 34mm
- G: M5

